


CASA-*ALU*


Full metal roll with very good ventilation properties

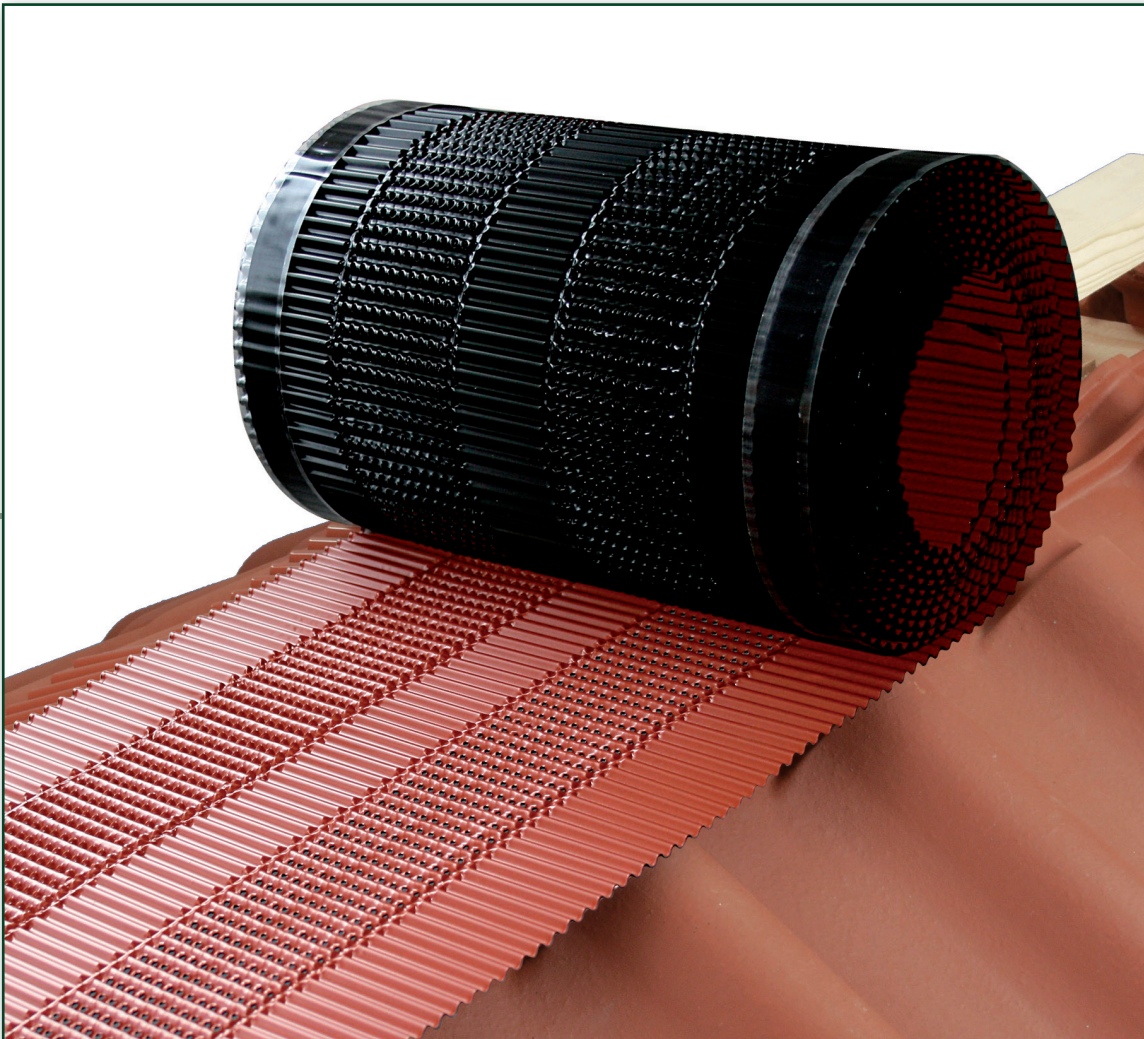

- Environmentally friendly solid aluminum metal
- Ventilation cross-section $200\text{cm}^2/\text{m}$ according to DIN 4108 Part 3
- Butyl adhesive application approx. 80 grams using the butyl liquid process - for the best adhesion and tightness
- Easy to process

Technical data

„Casa-Alu“ ridge and hip ventilation

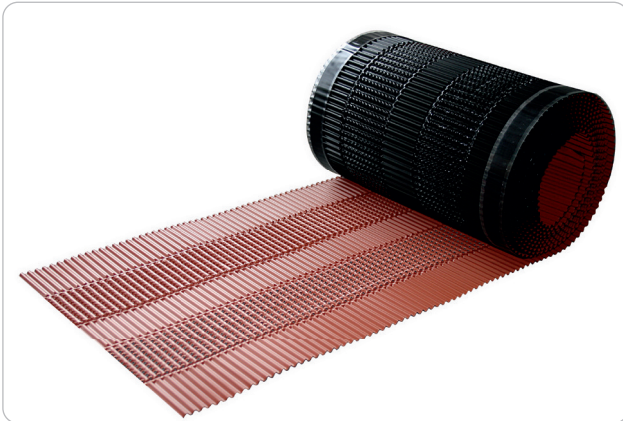

Material	colour coated aluminium
Material thickness	0.15mm
Butyl coating	approx. 80g/m
Roll width*	280mm, 300mm, 320mm, 390mm
Roll length	5.00m
Air permeability	approx. 200cm ² /m Ø complies with DIN 4108 , part 3
Processing temperature	+5°C to approx. +35°C
Colours supplied	brik red, brown, black
Delivery forms / packaging	4 rolls x 5m = 20m per box from 280mm to 320mm width = 600m per pallet 390mm width = 400m per pallet

* The 280mm, 300mm and 320mm width are particularly suited for the laying of normally profiled tile and concrete roof coverings. The 390mm wide product is specifically suited for the laying of heavily profiled roof coverings and ridge flashings.

Subject to technical changes 07/2024. We assume no liability for typing errors.