


CASA-ECO

The low-cost ventilation Roll with extremely high ventilation cross-section

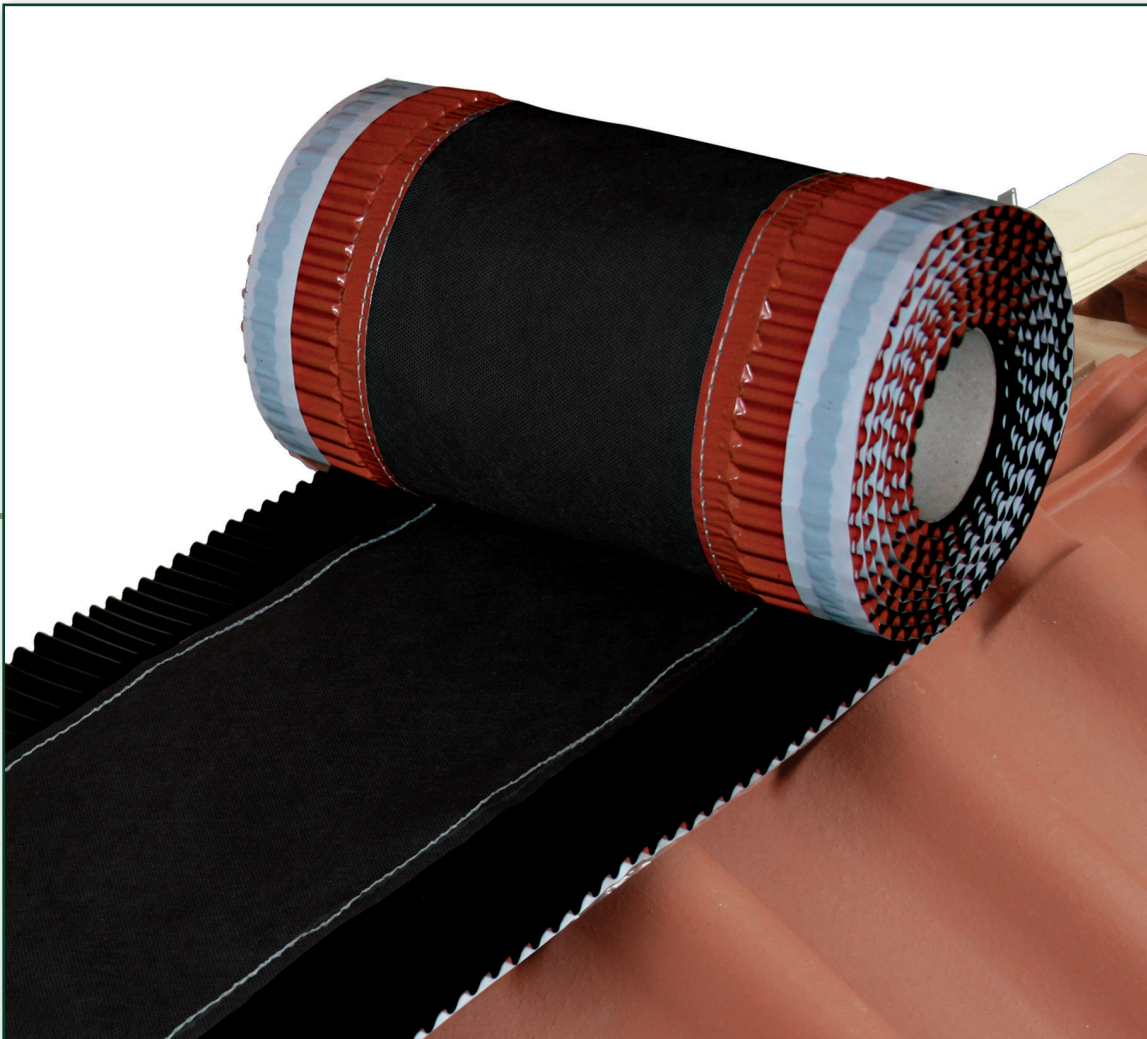

- Double security due to glued and sewn seam
- The UV stabilized PET spun bonded fabric provides reliable protection against driving rain and snow
- Easy to process

Technical data

“Casa-eco” ridge and hip ventilation



Material (edges)	colour coated aluminium
Material (centre part)	PP-Spinnvlies
Material composite	bonded and stitched
Roll width*	320mm and 370mm
Roll length	5.00m
Butyl coating	approx. 65g/m
Air permeability	approx. 250cm ² /m Ø complies with DIN 4108, part 3
UV stability	indirect exposure ≥ 5 years
Temperature resistance	-30°C to +95°C
Processing temperature	+5°C to approx. +35°C
Colours supplied (edges)	brick red, black, brown
Delivery forms / packaging	4 rolls x 5m = 20m per box 600m per pallet

* The 320mm width is particularly suited for the laying of normally profiled tile and concrete roof coverings. The 370mm wide product is specifically suited for the laying of heavily profiled roof coverings and ridge flashings.

Subject to technical changes 07/2024. We assume no liability for typing errors.