

# CASA-FLEX<sup>®</sup>


Tried and tested roof flashing



- A tried and tested product for safe connection between the roof and rising construction elements such as chimneys, eaves and similar
- Environmentally friendly aluminium
- Simple processing

# Technical data

## „Casa-Flex®“ roof flashing

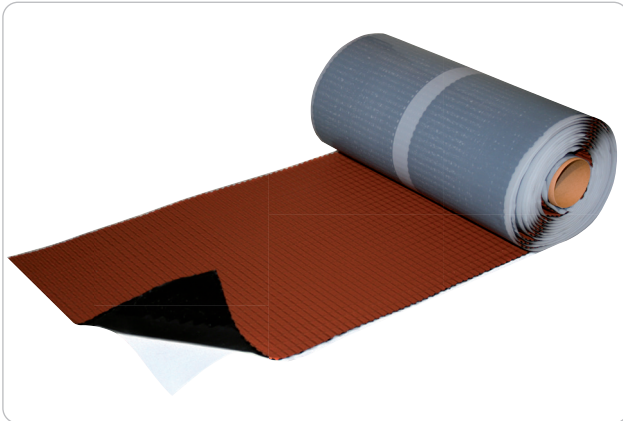

Material	Profiled aluminium foil, reverse side coated with butylbased adhesive and covered with two-part release paper
Material thickness complete	1.5mm
Thickness of Aluminium	0.5mm
Thickness of self-adhesive butyl backing	approx. 1.0mm
Bonding the self-adhesive coating	The substrate must be stable, dry and dust-free
Temperature resistance	-30°C up to +80°C
Processing temperature	+5°C up to + 35°C
UV-stability	UV stable and weather resistant
Roll width	300mm, 320mm and 450mm
Roll length	5.00m
Weight of roll	300mm width = approx. 4.4kg 450mm width = approx. 6.5kg
Colours supplied	Coated on one side: red, black, brown, grey
Packaging	1 roll = 5m per box 360m per pallet
Storage conditions	Store dry at room temperature, protected from direct UV radiation. Store rolls upright!

Subject to technical changes 07/2024. We assume no liability for typing errors.